



## Description

### [Technical Field of the Invention]

[0001] The present invention relates to an inflator which generates a gas for inflating air bags. More specifically, the present invention relates to an inflator having an advantage in that the gas can be expelled and supplied linearly in the axial direction of a bottle.

### [Description of the Related Art]

[0002] Inflators are gas generators that generate a gas for inflating air bags for vehicles. Inflators can be broadly divided into two groups: inflators that expel a high pressure gas contained in a container and supply it to an air bag (hybrid type and stored gas type), and inflators that burn a gas generating agent (propellant) and generate a gas by utilizing a chemical reaction (combustion type).

[0003] An example of a stored gas type inflator is shown in Fig. 6.

[0004] Fig. 6 is a sectional side view which schematically shows an inflator disclosed in Japanese Unexamined Patent Application Publication No. 10-250525 as an example of a conventional stored gas type inflator.

[0005] With reference to the figure, an inflator 100 contains a bottle 101 which is filled with a high pressure gas. One end (the right end in the figure) 102 of the bottle 101 is closed and the other end (the left end in the figure) 103 of the bottle 101 is open. A sleeve 109 is connected to the open end 103 of the bottle 101 via an annular ring 106. The inner end of the ring 106, which forms an inside hole 106a, protrudes from the interior surfaces of the bottle 101 and the sleeve 109.

[0006] A burst disk 107 is attached to the ring 106 at the left side (the side facing the sleeve 109) thereof by welding, etc. The burst disk 107 is constructed of a steel plate having a thickness of approximately 0.3 mm. The burst disk 107 receives the filling pressure of the gas contained in the bottle 101 and swells toward the sleeve 109. In a normal state in which the inflator 100 is not activated, the bottle 101 is sealed by the burst disk 107.

[0007] A plurality of gas outlets 104, through which the high pressure gas is expelled when the inflator 100 is activated, are formed in the exterior surface of the sleeve 109. A housing 110 is attached to the sleeve 109 at the end (the left end in the figure) thereof. The housing 110 includes an initiator fixing member 110a, which is fit in the sleeve 109 at the end thereof, and a cylindrical portion 110b which protrudes from the initiator fixing member 110a. An initiator 112 is fixed inside the initiator fixing member 110a of the housing 110. A tip portion (at the right end) 112a of the initiator 112 is inserted beyond the initiator fixing member 110a into the cylindrical portion 110b. Terminals (at the left end) 112b of the initiator 112 are connected to a control unit via electric wires (not shown).

[0008] A piston 115, of which a tip 115a is sharply pointed, is disposed inside the cylindrical portion 110b of the housing 110. A hole 115b is formed in the piston 115 at the rear end thereof, and the tip portion 112a of the initiator 112 is disposed in the hole 115b. A tip 110c of the cylindrical portion 110b of the housing 110 is separated from the burst disk 107 by a predetermined distance as shown in the figure.

[0009] An air bag (not shown) is attached to the inflator 100 in such a manner that the air bag is communicated via the gas outlets 104. In a normal situation, the gas contained in the bottle 101 is sealed by the burst disk (sealing plate) 107. When the vehicle collides, a sensor (not shown) is activated and the initiator 112 generates an air blast, so that the piston 115 is pushed to the right in the figure. Then, the tip 115a of the piston 115 breaks the burst disk 107 at the midsection thereof, so that the entire body of the burst disk 107 is ruptured and opened widely. Then, the high pressure gas contained in the bottle 101 flows into the sleeve 109. The gas is then expelled out through the gas outlets 104 formed in the exterior surface of the sleeve 109 and supplied to the air bag.

### [Problems to be Solved by the Invention]

[0010] In the above-described conventional inflator 100, the initiator 112, the piston 115, and the burst disk 107 are arranged such that the centers thereof are in line, and the piston 115 which is pushed by the air blast generated by the initiator 112 moves straight ahead and breaks the burst disk 107. However, in the above-described construction, the direction in which the gas flows into the sleeve 109 through the open end 103 of the bottle 101 (the horizontal direction in the figure) is approximately perpendicular to the direction in which the gas is expelled through the gas outlets 104 of the sleeve 109 into the air bag (the vertical direction in the figure). Accordingly, there is a problem in that the gas cannot flow linearly and smoothly, and an additional component is necessary for changing the flowing direction of the gas.

[0011] In order to solve this problem, in Japanese Unexamined Patent Application Publication No. 9-58394, a gas generator in which a gas can be expelled in the axial direction of a bottle, that is, the direction from the closed end (the end opposite to the end closer to an initiator) toward the other, is disclosed. However, in the gas generator of the above-described publication, there is a problem in that the size and the manufacturing cost thereof are increased since a large housing which contains the entire apparatus including the bottle is additionally provided.

[0012] In view of the above-described situation, an object of the present invention is to provide an inflator wherein a gas can be expelled and supplied linearly in the axial direction of a bottle without increasing the size and the manufacturing cost thereof.

[Means for Solving the Problems]

[0013] According to the present invention, this object is achieved by an inflator as defined in claim 1 or claim 2. The dependent claim defines a preferred and advantageous embodiment of the present invention.

In order to solve the above-described problems, according to one aspect of the present invention, an inflator comprises a bottle which has an opening and which is filled with a high pressure gas; a sealing plate which seals the opening of the bottle; an initiator which generates an air blast which provides driving force for breaking the sealing plate; a piston which is accelerated by the air blast generated by the initiator and which breaks the sealing plate; and a curved passage which guides the air blast generated by the initiator to the piston.

[0014] According to the present invention, the air blast generated by the initiator moves non-linearly through the curved passage, and then pushes and accelerates the piston. Then, the accelerated piston breaks the sealing plate, and the high pressure gas contained in the bottle is expelled. Accordingly, it is not necessary to dispose the initiator in the axial direction of the bottle, and versatility of the design can be increased; for example, the high pressure gas can be expelled and supplied linearly in the axial direction of the bottle.

[0015] According to another aspect of the present invention, an inflator comprises a bottle which has an opening and which is filled with a high pressure gas; a sealing plate which seals the opening of the bottle; an initiator which generates an air blast which provides driving force for breaking the sealing plate; and a piston which is accelerated by the air blast generated by the initiator and which breaks the sealing plate. The bottle has a cylindrical shape, and the initiator is disposed in front of the opening of the bottle. In addition, a diffuser, which also has a cylindrical shape and which is provided with a gas outlet, is connected to the bottle in the extending direction thereof. In addition, the initiator is attached to the circumferential surface of the diffuser and the gas outlet is formed in the diffuser at the end opposite to the end closer to the bottle.

[0016] According to the present invention, the initiator is disposed in front of the opening of the bottle and is attached to the circumferential surface of the diffuser. Thus, the initiator is not disposed in the direction in which the high pressure gas is expelled. Accordingly, the high pressure gas can be expelled and supplied linearly in the axial direction of the bottle. The high pressure gas which comes out from inside the bottle flows linearly through the diffuser and is expelled out through the gas outlet formed in the diffuser at the end opposite to the end closer to the bottle.

[0017] The inflator of the present invention may further comprise a barrel having an inside hole which guides the piston, and the end surface of the barrel which is closer to the bottle may be in contact with the

sealing plate.

In such a case, the barrel receives a considerable percentage of the filling pressure of the gas contained in the bottle. Thus, even a sealing plate having a relatively small thickness can sustain a high pressure. After the sealing plate breaks, the gas flows through the space between the interior surface of the diffuser and the exterior surface of the barrel, and is then expelled through the gas outlet.

[Brief Description of the Drawings]

[0018]

Fig. 1 is a sectional view of an inflator according to an embodiment of the present invention in a state before the inflator is activated.

Fig. 2 is a sectional view of the inflator in a state immediately after activation of the inflator starts.

Fig. 3 is a sectional view of the inflator in a state in which the inflator is being activated.

Fig. 4 is an exploded sectional view of the inflator. Fig. 5 is a schematic drawing which shows modifications of a piston and a barrel of the inflator according to the present invention, where (A) and (B) are perspective views showing modifications of the piston, (C) and (D) are perspective views showing modifications of the barrel, (E) is a sectional view of (D) before activation, and (F) is a sectional view of (D) after activation.

Fig. 6 is a sectional side view which schematically shows an inflator disclosed in Japanese Unexamined Patent Application Publication No. 10-250525 as an example of a conventional stored gas type inflator.

[Description of Preferred Embodiments]

[0019] The present invention will be further illustrated in conjunction with the drawings.

Fig. 1 is a sectional view of an inflator according to an embodiment of the present invention in a state before the inflator is activated.

Fig. 2 is a sectional view of the inflator in a state immediately after activation of the inflator starts.

Fig. 3 is a sectional view of the inflator in a state in which the inflator is being activated.

Fig. 4 is an exploded sectional view of the inflator.

In the following descriptions, the "horizontal direction" and "vertical direction" correspond to the horizontal and vertical directions as seen in the figures.

[0020] With reference to the figures, an inflator 1 includes a bottle 3 which is formed of steel and which has a cylindrical shape. The bottle 3 has an end portion 4 having a hemispherical shape at the right end thereof, and an opening 5 at the left end thereof. A hole 4a is formed in the end portion 4 of the bottle 3, and a gas such as an inert gas, etc., is injected into an interior 3C

of the bottle 3 through the hole 4a at a high pressure. After the interior 3C of the bottle is filled with the gas, the hole 4a is blocked by a steel ball 4b so that the gas is sealed.

[0021] A diffuser 12 is connected to the opening 5 of the bottle 3 via a ring 6 which is constructed of a steel plate having an annular shape. The bottle 3, the ring 6, and the diffuser 12 all have the same outside diameter and are joined together by welding, etc. As shown in Figs. 1 to 3, the inner end of the ring 6, which forms an inside hole 6a, protrudes from the interior surfaces of the bottle 3 and the diffuser 12. A sealing plate (burst disk) 9, which is constructed of a disk-shaped steel plate, is attached to the ring 6 at the right side (the side facing the bottle 3) thereof by welding, etc. The inside hole 6a of the ring 6 (the opening 5 of the bottle 3) is sealed by the sealing plate 9. The thickness of the sealing plate 9 is, for example, 0.2 to 0.4 mm.

[0022] The diffuser 12 is a cylindrical member formed of steel, etc., and the right end portion (a portion connected to the ring 6) thereof has the shape of a straight cylinder. The diffuser 12 is tapered toward the left end thereof, and a gas outlet 15 is formed at the left side of the tapered portion. When the inflator 1 is activated, the high pressure gas contained in the bottle 3 is expelled through the gas outlet 15. A flange 15a is formed at the end of the gas outlet 15, and an external thread 15b is formed in the exterior surface thereof. The external thread 15b is engaged with a fixing flange 25 (see Fig. 4), which is provided for securing an open end of an air bag (not shown).

[0023] A through hole 12a is formed in the circumferential surface (the bottom surface as seen in the figures) of the diffuser 12, and a housing 17 is inserted through the through hole 12a. As is comprehensively shown in Fig. 4, the housing 17 includes an inside part 17A, which is disposed inside the diffuser 12, and an outside part 17B, which is disposed outside the diffuser 12. The inside and outside parts 17A and 17B are joined together by welding, caulking, etc. The upper surface of the housing 17 (the upper surface of the inside part 17A) is closed, and the bottom surface thereof (the bottom surface of the outside part 17B) is open.

[0024] An initiator 11 is retained in the outside part 17B of the housing 17, and an end portion of the initiator 11 is inserted in the inside part 17A. The initiator 11 is connected to a control unit (not shown) via electric wires. The initiator 11 generates an air blast which provides driving force for breaking the sealing plate 9 when the inflator 1 is activated.

[0025] As is comprehensively shown in Fig. 4, a through hole 17C is formed in the right surface of the inside part 17A of the housing 17 at the right side thereof. An internal thread is formed in the inner periphery of the through hole 17C, and a barrel 21 having a cylindrical shape is screwed into the through hole 17C. As shown in Figs. 1 to 3, in the state in which the housing 17 and the barrel 21 are joined, they are constructed like

a reducing elbow having a curved passage therein. One end of the barrel 21 (the right end in Fig. 1) is in contact with the side surface of the sealing plate 9 at the left side thereof. Accordingly, the barrel 21 receives a considerable percentage of the filling pressure applied to the sealing plate 9 by the gas contained in the bottle 3. Thus, the sealing plate 9 having a relatively small thickness such as 0.2 to 0.4 mm can sustain a high pressure.

[0026] As shown in Figs. 1 to 3, the barrel 21 has an inside hole which includes a large diameter portion 21A at the side closer to the housing 17 and a small diameter portion 21B at the side closest to the sealing plate 9. A piston 23, which includes a shaft portion 23a and a flange portion 23b, is disposed inside the inside hole of the barrel 21 in a slidable manner. The outside diameter of the shaft portion 23a is slightly smaller than the inside diameter of the small diameter portion 21B, and the outside diameter of the flange portion 23b is slightly smaller than the inside diameter of the large diameter portion 21A. The tip of the piston 23 is sharply pointed.

[0027] Next, the operation of the inflator 1 having the above-described construction will be described below.

As shown in Fig. 1, in a normal state in which the inflator 1 is not activated, the interior 3C of the bottle 3 is filled with the gas and is sealed by the sealing plate 9. The sealing plate 9 serves to prevent the gas from leaking through the opening 5 of the bottle 3. The piston 23 is retained in the barrel 21 at a predetermined position shown in Fig. 1. In this state, the right end of the barrel 21 is in contact with the sealing plate 9, and the tip of the piston 23 is separated from the sealing plate 9.

[0028] When a vehicle containing the inflator 1, which is in a state shown in Fig. 1, receives the impact, the inflator 1 is activated and the high pressure gas contained in the bottle 3 is supplied to the air bag (not shown). In such an emergency situation, the control unit (not shown) outputs an electric ignition signal, and the initiator 11 generates an air blast based on the ignition signal. Accordingly, as shown in Fig. 2, air flows inside the inside part 17A of the housing 17 and the large diameter portion 21A of the barrel 21 along the curved passage, so that the piston 23 is pushed to the right in the figure.

[0029] Then, as shown in Fig. 3, the tip of the piston 23, which is pushed by the air blast, breaks the sealing plate 9. Accordingly, the entire region of the sealing plate 9 ruptures and the high pressure gas contained in the bottle 3 starts flowing out through between the exterior surface of the barrel 21 and the inside hole 6a of the ring 6 into the diffuser 12. The gas is then expelled and supplied to the air bag (not shown) through the gas outlet 15. Accordingly, the air bag is inflated. As described above, during the time in which the gas comes out from the bottle 3, flows inside the diffuser 12, and is supplied into the air bag, the gas flows linearly. The piston 23 pushed by the air blast generated by the initiator 11 is stopped since the flange portion 23b encounters the step portion between the large diameter portion 21A and

the small diameter portion 21B inside the barrel 21.

[0030] Next, modifications of the piston and the barrel will be described below.

Fig. 5 is a schematic drawing which shows modifications of the piston and the barrel. In Fig. 5, (A) and (B) are perspective views showing modifications of the piston of the inflator according to the present invention, and (C) and (D) are perspective views showing modifications of the barrel of the inflator according to the present invention. In addition, (E) is a sectional view of (D) before activation, and (F) is a sectional view of (D) after activation.

A piston 30 shown in Fig. 5(A) includes a shaft portion 30a and a flange portion 30b. The tip of the shaft portion 30a is sharply pointed. A plurality of grooves 30c is formed in the peripheral surface of the flange portion 30b along the thickness direction thereof. In the piston 30, when the initiator is activated, air flows through the grooves 30c toward the tip of the piston 30. Accordingly, the internal pressure of the barrel can be reduced, so that the pressure resistance of the barrel can be set to a relatively low value.

[0031] A piston 35 shown in Fig. 5(B) includes a shaft portion 35a and a flange portion 35b. A hollow portion 35c is formed along the shaft center (that is, the center of the shaft portion 35a and the flange portion 35b) of the piston 35. In the piston 35, when the initiator is activated, air flows through the hollow portion 35c toward the sealing plate, so that the midsection of the sealing plate ruptures such that a circular hole is formed therein. Accordingly, the sealing plate always breaks in a similar manner.

[0032] A barrel 40 shown in Fig. 5(C) includes a main body 41 having a cylindrical shape, and a flange 42 is formed at the end of the main body 41 which is closer to the bottle (that is, the end closer to the sealing plate, or the right end in the figure). A plurality of holes (orifices) 42a are formed in the flange 42. In the barrel 40, the flange 42 having a large area is in contact with the sealing plate. Accordingly, the sealing plate can be more effectively restrained. After the sealing plate is ruptured by the piston which slides inside the barrel 40, the gas contained inside the bottle flows through the holes 42a.

[0033] A barrel 45 shown in Fig. 5(D), (E), and (F) includes a main body 46 having a cylindrical shape, and the diameter of an end portion 47 of the main body 46 at the end closer to the bottle (that is, the end closer to the sealing plate, or the right end in the figure) is gradually reduced. In addition, the diameter of an end portion 48 of the main body 46 at the end farther from the bottle (that is, the end closer to the housing, or the left end in the figure) is gradually increased. In the barrel 45, the tip of a piston 50 is inside the barrel 45 in the state before activation, and the tip of the piston 50 protrudes out from the opening formed in the end portion 47 of the barrel 45 in the state after activation. The piston 50 slides inside the main body 46 and is then stopped by becoming engaged by an inside hole of the end portion 47 which

becomes narrower toward the end. Accordingly, the above-described flange portion, which is formed at the rear end of the piston, can be omitted and the shape of the piston can be made simpler.

[0034] In addition, the above-described inflator allows, for example, the following modifications.

(1) A construction in which the initiator is omitted and the piston is manually moved in order to break the sealing plate. This construction is effective in a case in which the inflator is applied to a device which is not an air bag apparatus for vehicles (for example, extinguisher, life jacket, etc.).

(2) A construction in which the piston is disposed inside the bottle.

(3) A construction in which the housing is attached to the side surface of the bottle, and the internal pressure of the bottle is increased by using solid, liquid, fuel, etc., so as to break the sealing plate. In this case, the piston can be omitted.

#### [Advantages]

[0035] As is apparent from the foregoing explanations, according to the present invention, an inflator in which a gas can be expelled and supplied linearly in the axial direction a bottle without increasing the size and the manufacturing cost thereof can be provided.

#### Claims

##### 1. An inflator comprising:

a bottle (3) which has an opening (5) and which is filled with a high pressure gas;  
a sealing plate (9) which seals the opening (5) of the bottle (3);  
an initiator (11) which generates an air blast which provides driving force for breaking the sealing plate (9);  
a piston (23; 30; 35; 50) which is accelerated by the air blast generated by the initiator (11) and which breaks the sealing plate (9); and  
a curved passage (17, 21) which guides the air blast generated by the initiator (11) to the piston (23; 30; 35; 50).

##### 2. An inflator comprising:

a bottle (3) which has an opening (5) and which is filled with a high pressure gas;  
a sealing plate (9) which seals the opening (5) of the bottle (3);  
an initiator (11) which generates an air blast which provides driving force for breaking the sealing plate (9); and  
a piston (23; 30; 35; 50) which is accelerated

by the air blast generated by the initiator (11)  
and which breaks the sealing plate (9),

wherein the bottle (3) has a cylindrical shape,  
wherein the initiator (11) is disposed in front 5  
of the opening (5) of the bottle (3) and a diffuser  
(12), which also has a cylindrical shape and which  
is provided with a gas outlet (15), is connected to  
the bottle (3) in the extending direction thereof, and  
wherein the initiator (11) is attached to the cir- 10  
cumferential surface of the diffuser (12) and the gas  
outlet (15) is formed in the diffuser (12) at the end  
opposite to the end closer to the bottle (3).

3. An inflator according to one of Claim 1 and Claim 15  
2, further comprising a barrel (21; 40; 45) having an  
inside hole which guides the piston (23; 30; 35; 50),  
wherein the end surface of the barrel (21; 40;  
45) which is closer to the bottle (3) is in contact with 20  
the sealing plate (9).

25

30

35

40

45

50

55

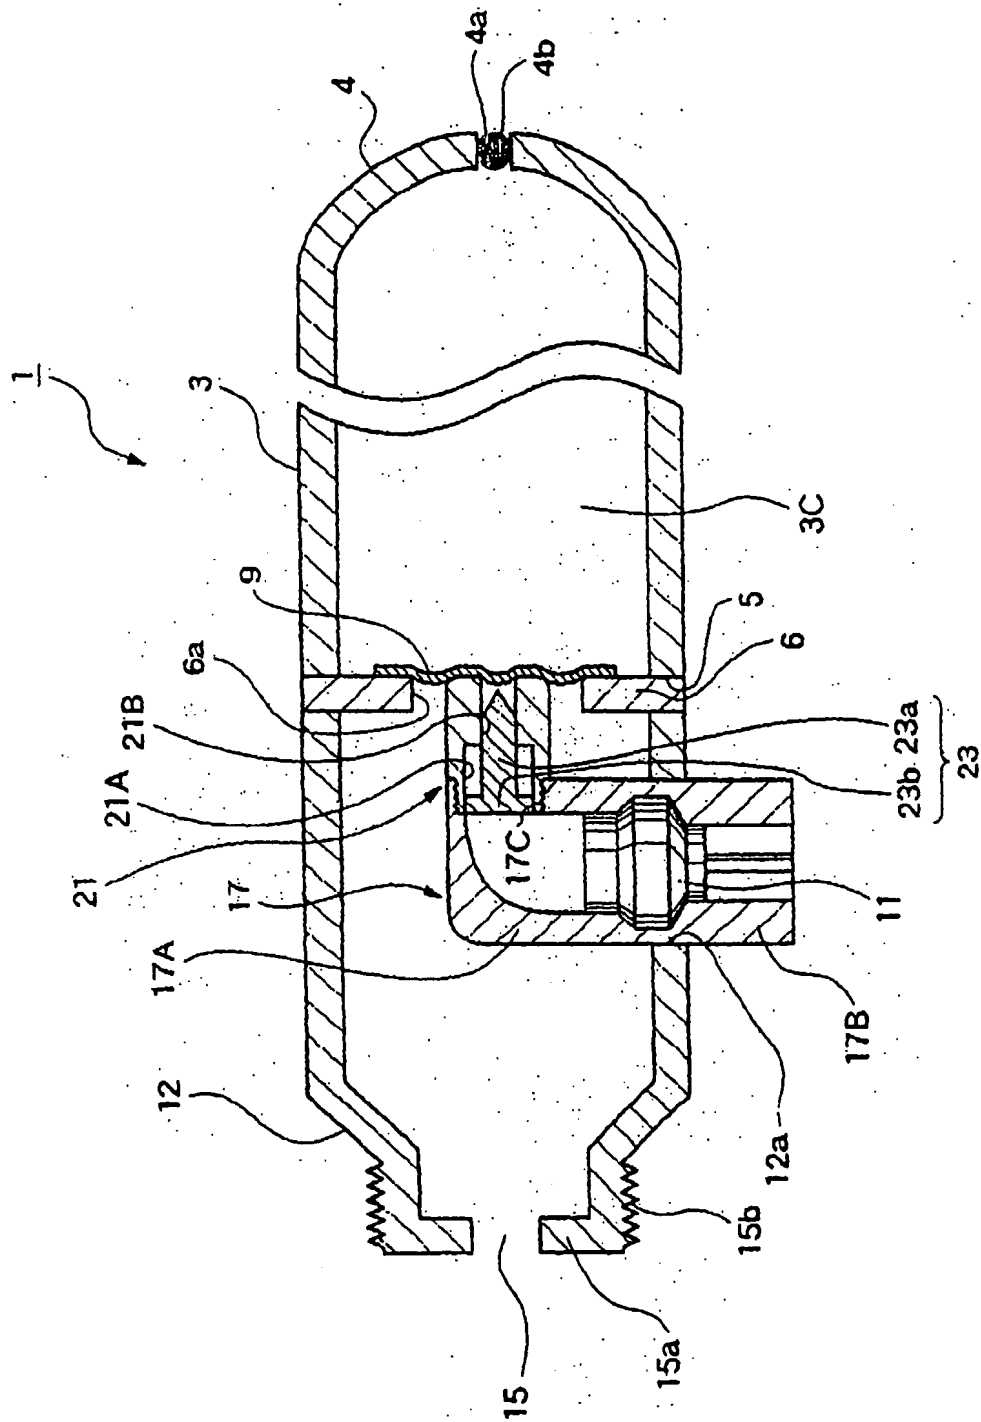


Fig. 1

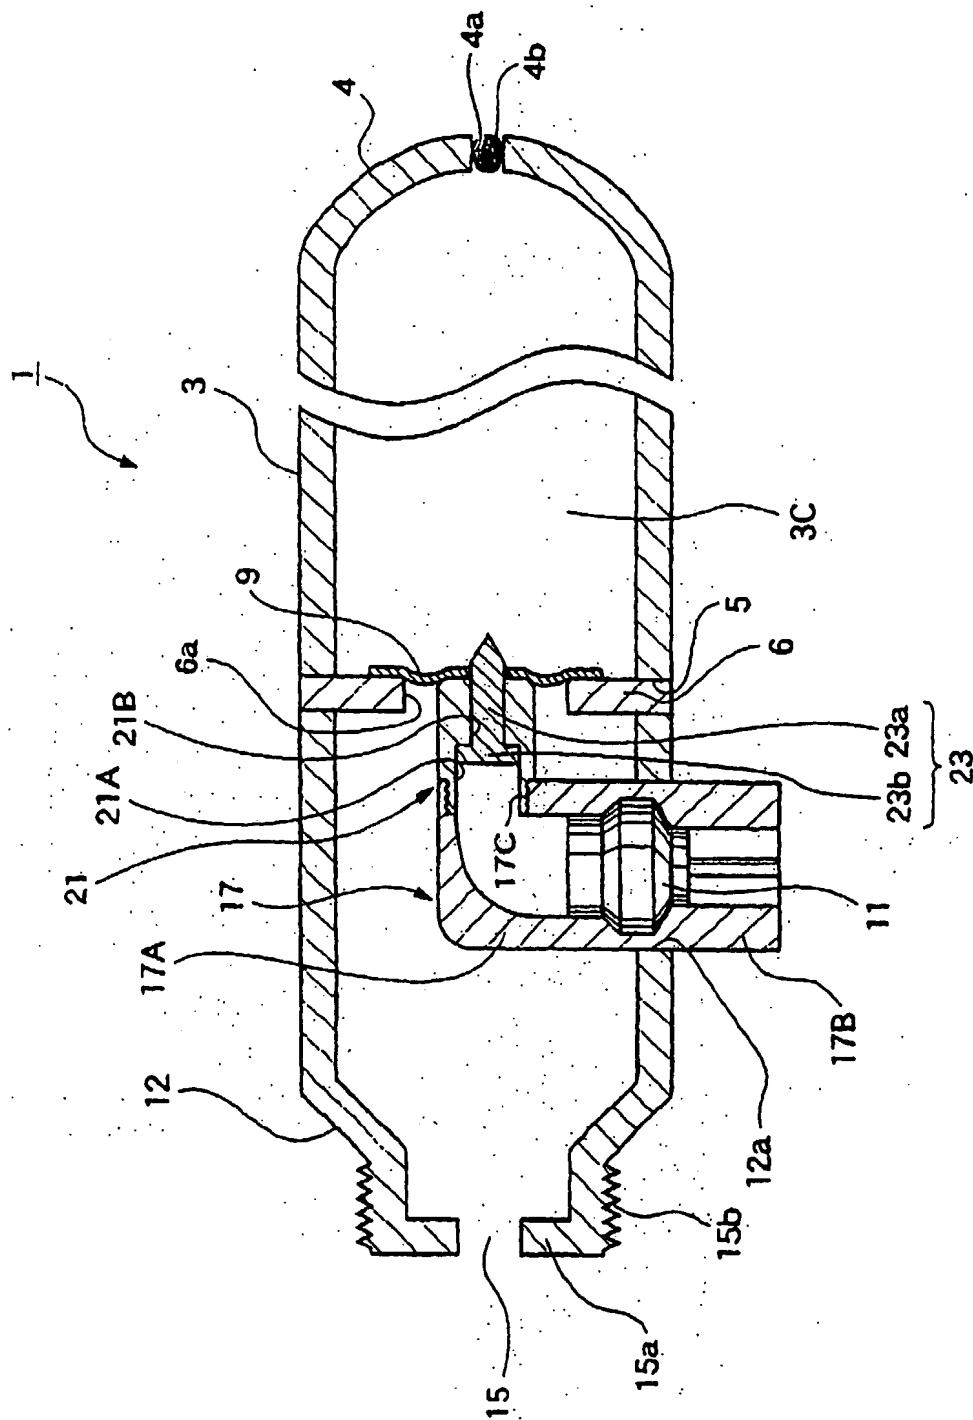


Fig. 2

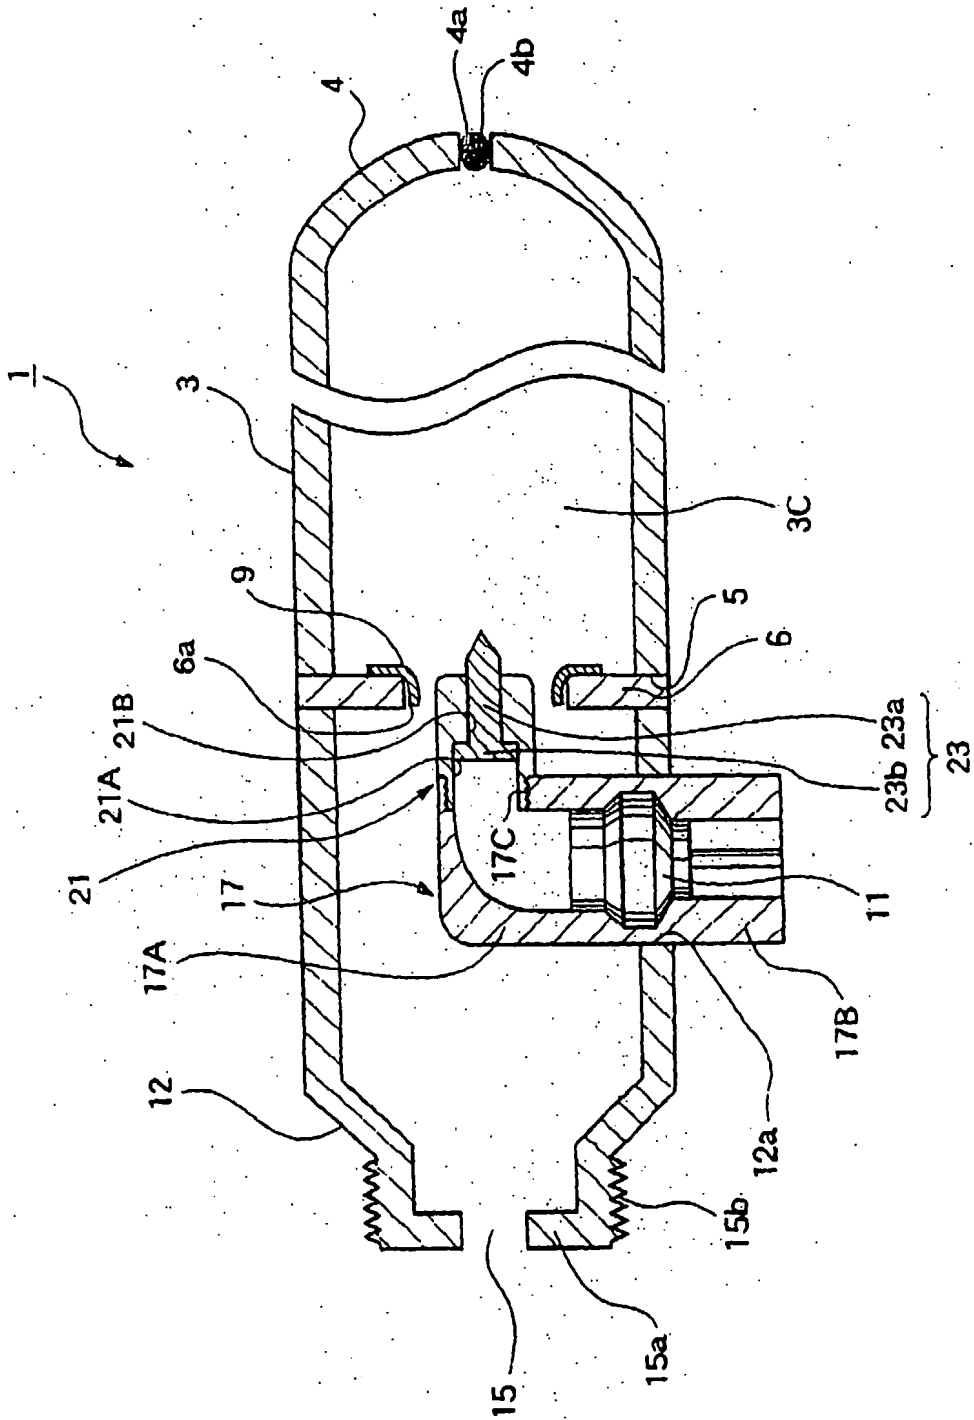


Fig. 3



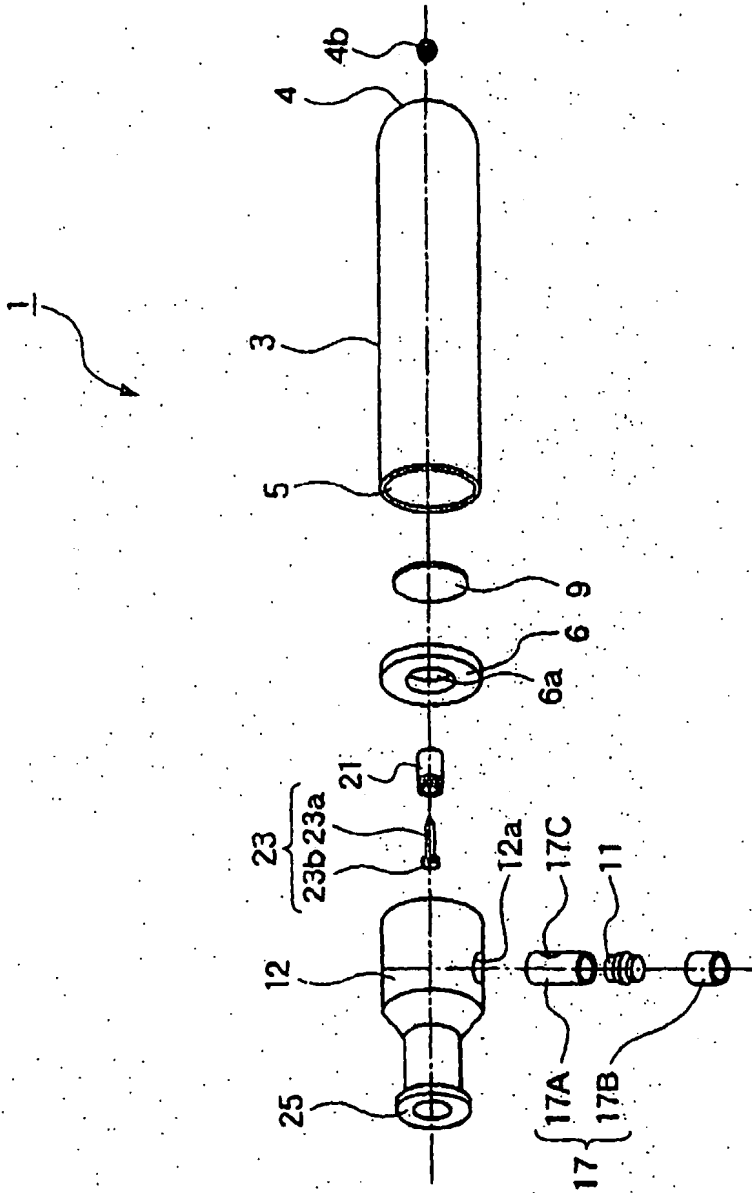


Fig. 4


(A)

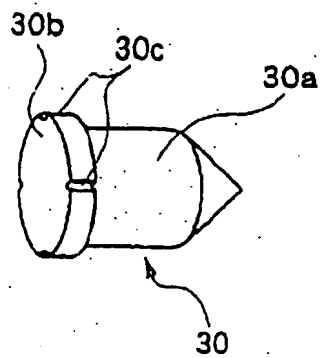


(B)




(C)

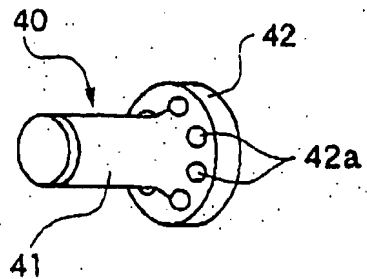

(D)

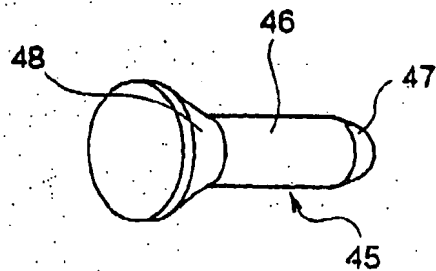

(E)

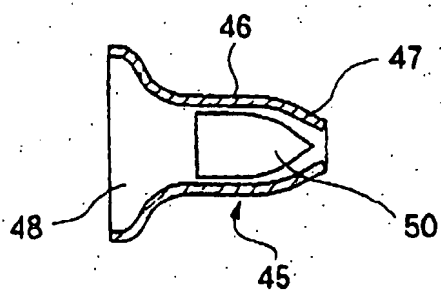

(F)

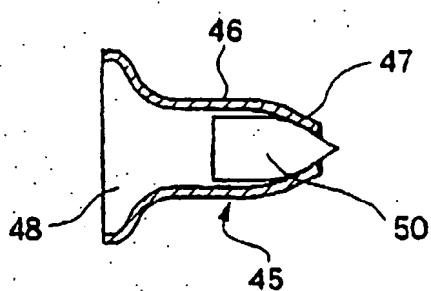


Fig. 5

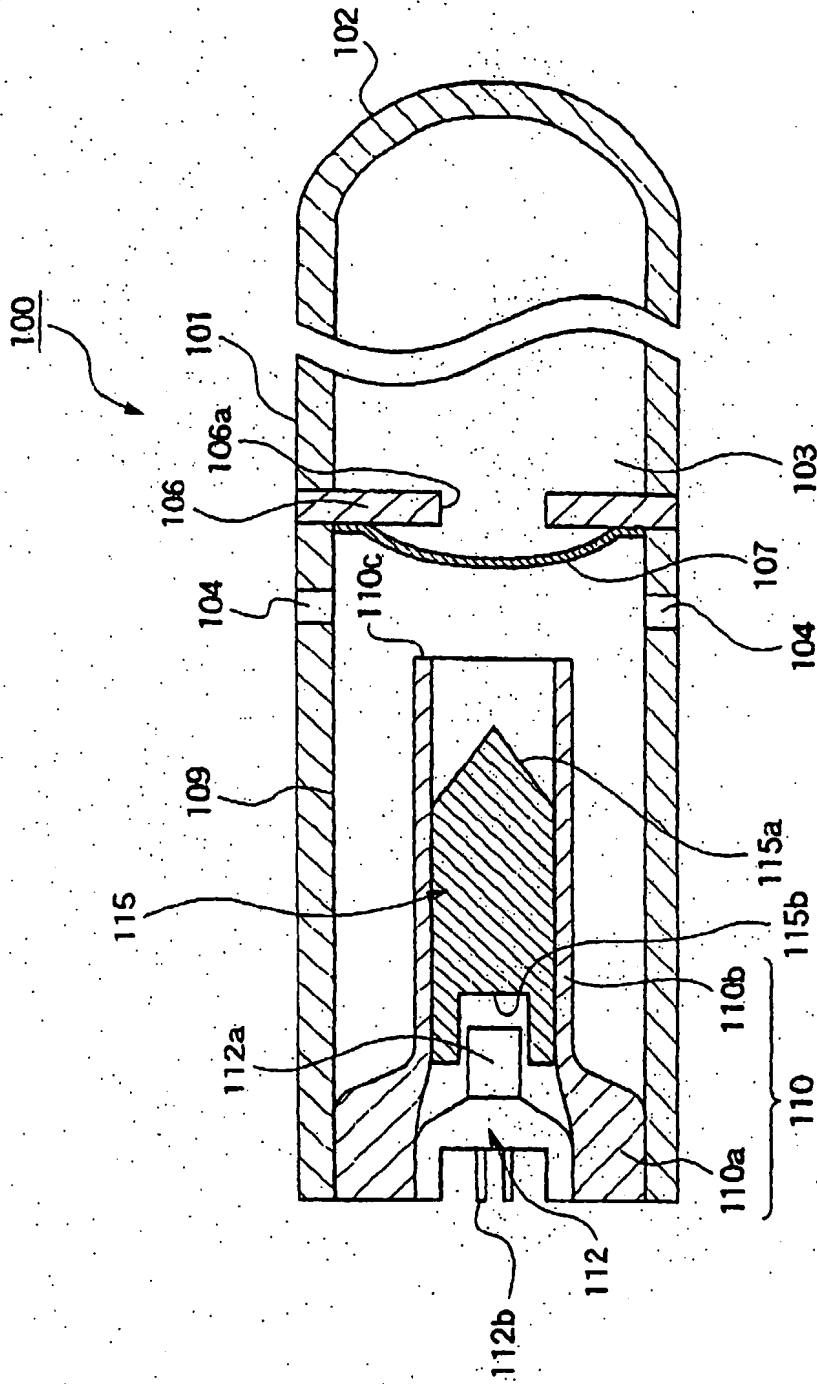


Fig. 6



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**26.05.2004 Bulletin 2004/22**

(51) Int Cl.7: **B60R 21/26**

(43) Date of publication A2:  
**17.07.2002 Bulletin 2002/29**

(21) Application number: **01129374.3**

(22) Date of filing: **18.12.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
 Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
 • **Mizuno, Hideki, Takata Corporation**  
**Tokyo 106-8510 (JP)**  
 • **Yano, Kanji, Takata Corporation**  
**Tokyo 106-8510 (JP)**

(30) Priority: **15.01.2001 JP 2001006583**


(74) Representative:  
**Banzer, Hans-Jörg, Dipl.-Ing. et al**  
**Kraus & Weisert**  
**Patent- und Rechtsanwälte**  
**Thomas-Wimmer-Ring 15**  
**80539 München (DE)**

(71) Applicant: **TAKATA CORPORATION**  
**Minato-ku, Tokyo 106-8510 (JP)**

(54) **Inflator**

(57) The object is to provide an inflator wherein a gas can be expelled and supplied linearly in the axial direction of a bottle. In order to solve this problem, an inflator (1) includes a bottle (3), of which an opening (5) is connected to a diffuser (12) via a ring (6). A housing (17) is attached to the circumferential surface of the diffuser (12). An initiator (11) is retained in an outside part (17B) of the housing (17), and a barrel (21) is secured to an inside part (17A) of the housing (17). A piston (23)

is disposed inside the barrel (21) in a slidable manner. When the initiator (11) generates an air blast, air flows inside the inside part (17A) of the housing (17) and a large diameter portion (21A) of the barrel (21) along a curved passage. Then, the piston (23) is pushed by the air blast and breaks a sealing plate (9) attached to the ring (6). Accordingly, a high pressure gas contained in the bottle (3) flows linearly inside the diffuser (12) and is then expelled out through a gas outlet (15).

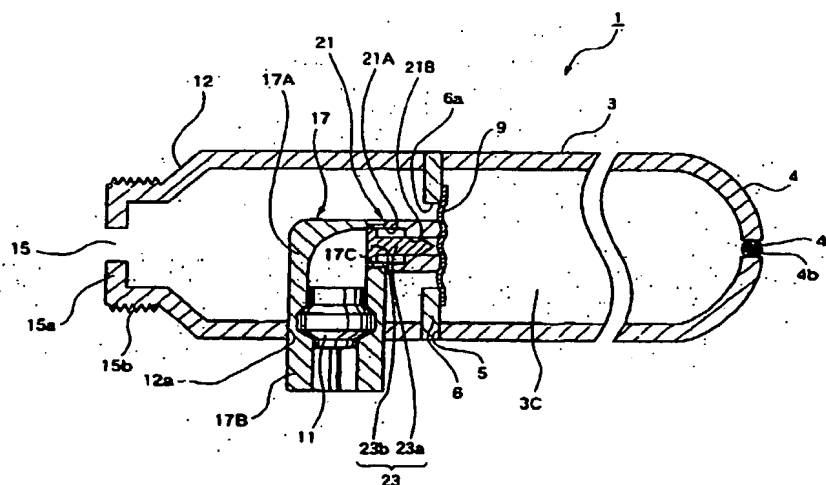

**Fig. 1**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 12 9374

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Incl.7)
Y	US 5 152 550 A (BROCKMAN STEPHEN J ET AL) 6 October 1992 (1992-10-06)	1,2	B68R21/26
A	* column 6, line 38 - column 8, line 10; figures 4-8 *	3	
Y	EP 0 604 001 A (TRW VEHICLE SAFETY SYSTEMS) 29 June 1994 (1994-06-29)	1,2	
A	* the whole document *	3	
A	US 5 022 674 A (FRANTOM RICHARD L ET AL) 11 June 1991 (1991-06-11)	1-3	
A	* claims 1-4,14,15; figures 1-13 *	1-3	
A	US 5 076 607 A (WOODS CHARLES D ET AL) 31 December 1991 (1991-12-31)	1-3	TECHNICAL FIELDS SEARCHED (Incl.7)  B68R H01J G09G
A	* claims 1-11; figures 1-4 *	1-3	
A	EP 0 512 747 A (OEA INC) 11 November 1992 (1992-11-11)	1-3	
A	* claims 1,2,9,11; figures 1-23 *	1-3	
A	US 5 513 572 A (FRANTOM RICHARD ET AL) 7 May 1996 (1996-05-07)	1-3	
A	* claims 1,2; figure 1 *	1-3	
A	US 5 257 819 A (FRANTOM RICHARD L ET AL) 2 November 1993 (1993-11-02)	1-3	
A	* claims 1,2,9,17; figures 1-4 *		
The present search report has been drawn up for all claims			
Place of search Berlin		Date of completion of the search 1 April 2004	Examiner Thomas, C
<b>CATEGORY OF CITED DOCUMENTS</b> X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document		T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document	

EPO FORM 1503 (02.02.92) (p.0001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 9374

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-04-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5152550	A	06-10-1992	US 5145208 A	08-09-1992
			AU 656413 B2	02-02-1995
			AU 2431092 A	02-03-1993
			CA 2093140 A1	08-02-1993
			EP 0551508 A1	21-07-1993
			FI 931504 A	02-04-1993
			JP 6501664 T	24-02-1994
			MX 9204519 A1	01-04-1993
			NO 931311 A	06-04-1993
			WO 9302894 A1	18-02-1993
EP 0604001	A	29-06-1994	US 5344186 A	06-09-1994
			DE 69304183 D1	26-09-1996
			DE 69304183 T2	23-01-1997
			EP 0604001 A1	29-06-1994
			ES 2090886 T3	16-10-1996
			JP 2671971 B2	05-11-1997
			JP 7002045 A	06-01-1995
US 5022674	A	11-06-1991	AU 7563491 A	30-10-1991
			CA 2076002 A1	06-10-1991
			DE 69106127 D1	02-02-1995
			DE 69106127 T2	10-08-1995
			EP 0523108 A1	20-01-1993
			ES 2067225 T3	16-03-1995
			JP 3089358 B2	18-09-2000
			JP 5506195 T	16-09-1993
			KR 215260 B1	16-08-1999
			WO 9115380 A1	17-10-1991
US 5076607	A	31-12-1991	DE 69107093 D1	09-03-1995
			DE 69107093 T2	14-09-1995
			EP 0558651 A1	08-09-1993
			ES 2067323 T3	16-03-1995
			JP 6503288 T	14-04-1994
			JP 3114123 B2	04-12-2000
			KR 9711515 B1	11-07-1997
			MX 9102038 A1	31-01-1994
			WO 9209459 A1	11-06-1992
			US 5351988 A	04-10-1994
			US 5257819 A	02-11-1993
EP 0512747	A	11-11-1992	US 5230531 A	27-07-1993
			DE 69213311 D1	10-10-1996
			DE 69213311 T2	09-01-1997
			EP 0512747 A1	11-11-1992

EPO/COM/REG

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 9374

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-04-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0512747	A		JP 3215495 B2	09-10-2001
			JP 5154372 A	22-06-1993
-----				
US 5513572	A	07-05-1996	CA 2188055 A1	16-11-1995
			DE 69504331 D1	01-10-1998
			DE 69504331 T2	25-03-1999
			EP 0758964 A1	26-02-1997
			JP 2926153 B2	28-07-1999
			JP 9506058 T	17-06-1997
			WO 9530560 A1	16-11-1995
-----				
US 5257819	A	02-11-1993	US 5076607 A	31-12-1991
			DE 69107093 D1	09-03-1995
			DE 69107093 T2	14-09-1995
			EP 0558651 A1	08-09-1993
			ES 2067323 T3	16-03-1995
			JP 6503288 T	14-04-1994
			JP 3114123 B2	04-12-2000
			KR 9711515 B1	11-07-1997
			MX 9102038 A1	31-01-1994
			WO 9209459 A1	11-06-1992
			US 5351988 A	04-10-1994
			AT 134178 T	15-02-1996
			CA 2125859 A1	24-06-1993
			DE 69208370 D1	28-03-1996
			DE 69208370 T2	20-06-1996
			EP 0616578 A1	28-09-1994
			ES 2083845 T3	16-04-1996
			JP 2555541 B2	20-11-1996
			JP 7502470 T	16-03-1995
			KR 257666 B1	01-06-2000
			MX 9207259 A1	01-12-1993
			WO 9311973 A1	24-06-1993
-----				

EPO FORM P0159  
For more details about this annex : see Official Journal of the European Patent Office, No. 12/82